


# Uni-V Interlock

## 28mm gap for sliding panels

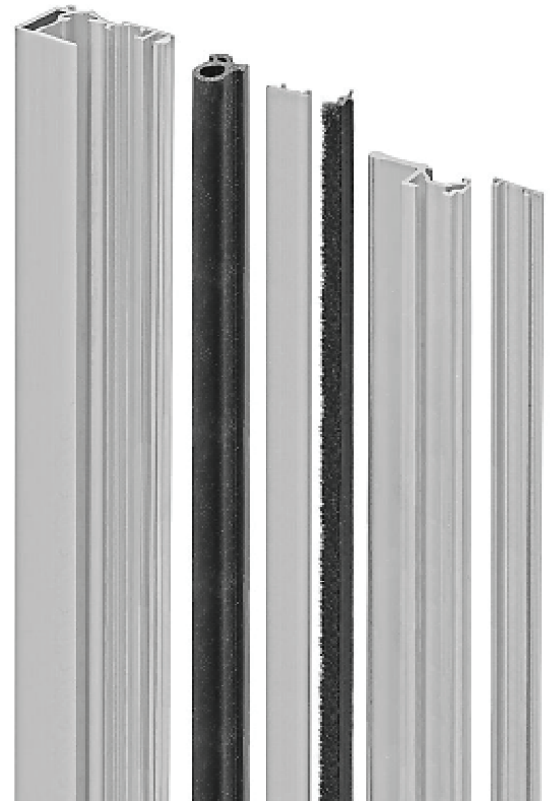

### Wide milling tolerances for quick & easy installation!

Uni-V by AGB for all types of sliding panels with 2 or more panels on a track (lift slide, patio doors, room dividers, etc). Features easy panel alignment with wide milling tolerances for quick and easy installation, while eliminating contact points between the sash and frame for silent operation.

### Features

- ▶ **Easy panel alignment** with wide milling tolerances
- ▶ **Compensates for panel warping** up to +/-3mm
- ▶ **For sliding panels** with 28mm panel gap<sup>1</sup>
- ▶ **Full panel height interlock** provides additional strength between panels for hurricane testing
- ▶ **Saves assembly time** with simple installation, comes predrilled for 3.5 x 30mm (#6 x 1¼”) screws (not included)
- ▶ **Includes screw cover** to conceal screws for a clean look
- ▶ **Kit includes EPDM bulb gasket**, brush seal and two aluminum profiles, one for each panel
- ▶ See data sheet or installation instructions for more information
- ▶ 1 year AGB warranty for manufacturing defects

<sup>1</sup> 28mm nominal gap with +2/-3mm lateral and +/-3mm “in-out” adjustment

### Kits include gasket and two aluminum profiles

#### Uni-V central point kit - Use one per panel pair

Item #	Description	Length	Anodizing
<b>G02208.31.01</b>	Interlock kit	3100mm (122”)	Silver
<b>G02208.40.01</b>	Interlock kit	4000mm (157½”)	Silver
<b>G02208.31.93</b>	Interlock kit	3100mm (122”)	Black
<b>G02208.40.93</b>	Interlock kit	4000mm (157½”)	Black

#### Accessories

<b>G01610.DX.93</b>	Cap kit	right-hand
<b>G01610.SX.93</b>	Cap kit	left-hand



End Cap Kit

See FFI Catalog section C for details, at [www.Fenestration.net](http://www.Fenestration.net). Contact FFI for details & ordering info: 800-677-0228 or [service@fenestration.net](mailto:service@fenestration.net)