




Features

- Powered control panels for 24VDC actuators
- Steel box enclosure with lockable cover
- DIN rail mounted 120VAC/24VDC power supply
- Quick connect input terminals
- One-touch open/close control using switch #SW-5686 switch (See accessories)
- Equipped with auxiliary input for use with rain, wind, or temperature controls.
- Two-year UCS manufacturer's warranty. Requires reading AFI Install Guide before purchase, and confirmation of project and installation specs by licensed electrical contractor.

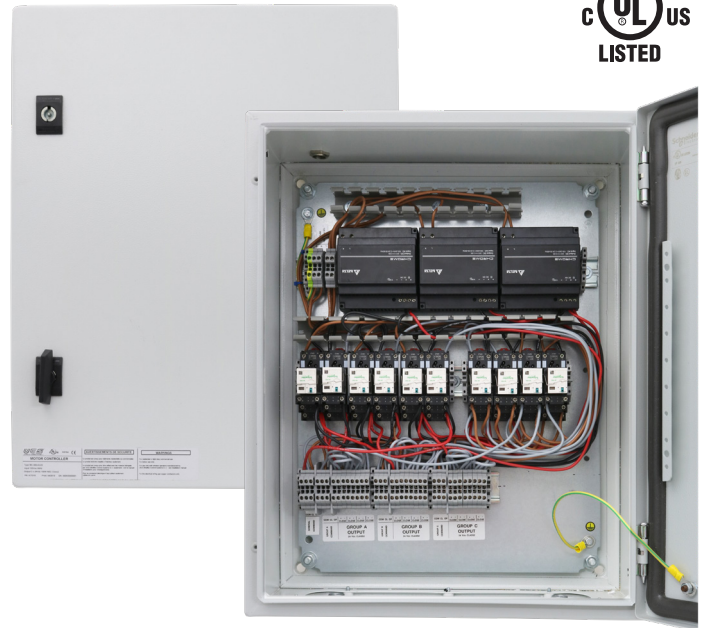

Each channel accepts up to 2.5A. Refer to actuator amp ratings below for required operation.

0-0.9A	
LM2	0.7A ea
Vega DC	0.7A ea
EM	0.8A ea
Quasar DC	0.8A ea
Quasar L DC	0.9A ea
CDi	0.9A ea

Fig A.

1-1.5A	
LM2 Tandem	2 x 0.5A
Ulysses	1.0A ea
FM (300N)	1.2A ea
Twin Vega Synchro	1.4A ea

1.5-1.9A	
EM Tandem	2 x 0.8A
FM (500N)	1.6A ea
FM (600N)	1.8A ea
Synchro Vega	1.8A/pair
Quasar L Synchro	1.8A/pair
Quasar Synchro	1.8A/pair
Quasar Twin Synchro	1.8A ea

2-2.9A	
FM (700N)	2.0A ea
FM (300N) Tandem	2 x 1.2A

MC Series

Part #	Description	Groups	Outputs	Use	Dimensions
41720K	100W Control panel	1	1	1-4 Actuators	15.75" x 11.81" x 7.87"
417240	200W Control panel	2	2	2-8 Actuators	19.69" x 15.75" x 7.87"
41701R	300W Control panel	3	3	3-12 Actuators	19.69" x 15.75" x 7.87"
41727R	400W Control panel	4	4	4-16 Actuators	23.62" x 15.75" x 7.87"
41798K	500W Control panel	5	5	5-20 Actuators	31.50" x 23.62" x 7.87"