

# RQ Bridge 422

**RQ Bridge translator for most BMS with RS422 protocol, or for PC programming.**

Bi-directional Serial Bridge to communicate between Home Automation systems and RQ motor controls via RS-422 using ASCII strings.

Up to 98 intermediate positions available with RQ commands.


Up to 62 scenes can be programmed and each can be activated with a single RQ command.

Small physical size allows for easy installation on every project.

Allows building automation systems like Crestron, AMX, Vantage, Control4, HAI, and others to query the RQ60AUMH 115 and RQ60AUMHE 230 motor controls for position and other status features.

Has a plastic housing; comes with a 12 volt DC external power supply.

CE rating.

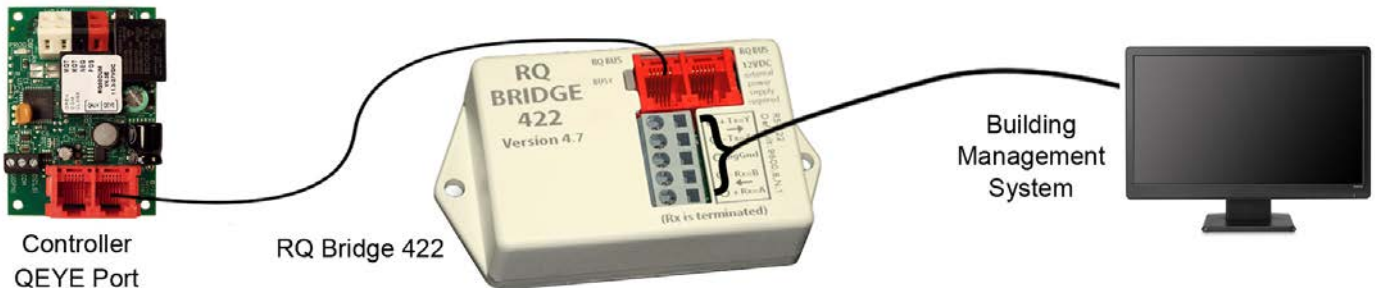

## Ordering Information: RQ Bridge 422

If in-stock, items ship within 24-48 hours

Part number	Description
RQ Bridge 422	RQ Bridge translator for most BMS with RS422 protocol, or for PC programming. Comes with a 12 volt DC external power supply.

Alternate bridge also available, RQ Bridge 232 for BMS with RS232 protocol.