

Momentary contact switch with key

Single-Pole, Double-Throw, 20 amp
part # **1257-L**

Applications

- Connects to FFI AC actuators directly or through Control Panel.
- Can be used with FFI DC actuators by connecting through Control Panel or Relay Box.

Features


- Momentary Contact, SPDT (Single-Pole, Double-Throw), center off, commercial grade switch.
- Back and side clamp-type wire terminals accept up to #10 CU wire.
- Momentary Contact means pressing the switch for a moment will activate the actuator(s) to open or closed position.
- Positive switching action with center-off position.
- Large, silver cadmium-oxide contacts for long life, prevent sticking, welding, and excessive pitting.
- Full rated current capacity on fluorescent, tungsten and resistive loads; motor load capacity up to 80% switch current rating.
- UL Listed (file #E-7458), CSA Certified (file #LR-3413), NOM Certified (#057).
- Ten-year Leviton limited manufacturer's warranty.
- Wall plate not included; install in a common single gang wall box.
- Color: black.



1257-L
with key



Key

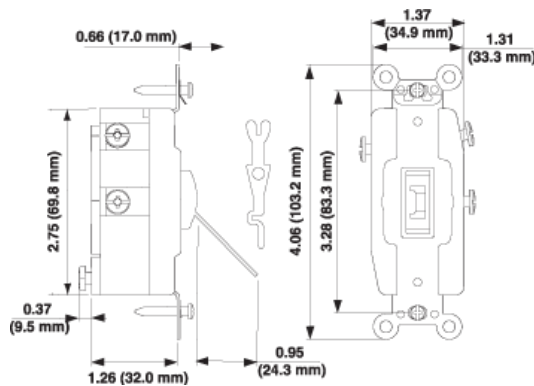

Specifications

Power Input	120 Vac
Amperage Rating	20 amps*
Safety Marks	UL Listed. NOM Certified.
Operating Environment	-40° to 65° C

* FFI recommends: do not exceed 80% of switch maximum capacity, therefore 16 amps.

Recommendations for FFI Actuators & Controls: FFI only recommends UL compliant systems. FFI is a UL registered firm. Read FFI data sheets & installation guides before specifying project details. Project-specific needs vary depending on the number of actuators, electrical layouts, building management systems, distance between power supplies & actuators, and other details. Project specifications to comply with electric & building codes—for wire gauge, wire connections and run distance, conduits, junction boxes—must be arranged by the project electrical contractors. Distribute this guide to all project parties, including electrical contractors, architects, and building management personnel.