

Features

- Quasar actuators are for awning windows, casement windows, hoppers, curtain wall vents and skylights.
- Synchro Quasar is for wide vents that require 2 to 4 motors, providing multiple sash connection points and synchronized operation. Available in low voltage 24VDC only.
- Multiple vents can be wired in parallel, and can be operated by building automation systems.
- Available as 15" (380mm) or 20" (500mm) chain operator; self-adjusting for proper closure at installation.
- Operator has stainless steel, double-link chain for rigidity and durability.
- Examples of 66 lbs operating force: 48" tall/844 lb. or a 264 lb. skylight (with 15" chain).
- Low-profile, attractive aluminum case; available in Black, White or Grey paint.
- Minimum sash height is 12" for 15" chain (16" for 20" chain).
- Synchro Quasar F-Signal has opening and closing feedback signal, ask for data sheet.
- Two-year UCS manufacturer's warranty. Requires reading AFI Install Guide before purchase, and confirmation of project and installation specs by licensed electrical contractor.




Mounting brackets available separately

Synchro Quasar

Part #	Chain	Color	Stroke (and force)
41172N*	15" Chain	Grey	Up to 380mm (200N)
41173R*		Black	Up to 380mm (200N)
41174T*		White	Up to 380mm (200N)
41175V	20" Chain	Grey	Up to 500mm (200N)
41176X		Black	Up to 500mm (200N)
41177Z		White	Up to 500mm (200N)

* 10 unit minimum order quantity on 15" chain models.

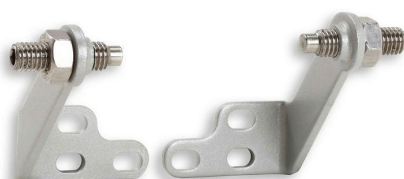


Mounting brackets ordered separately
Long Slim model, fits most profiles.

Mounting Brackets (Ordered separately)

Part #	Style	Color
41898F	Long Slim	Grey
41899G		Black
41900H		White
41901I	Short Slim	Grey
41902J		Black
41903K		White
40843F	Die-cast	Grey
40844G		Black
40845H		White

Specifications

Supply voltage	24VDC Low Voltage
Nom. Current draw	0.9A average
Limit stop	(Open): Built in limit switch (Closed) Integrated electronic power cut-off
Chain stroke (approx)	380mm (12") or 500mm (20")
Push force (Max)	66 lbs (200N)
Pull force (Max)	66 lbs (200N)
Chain speed	15mm/sec
Dimensions	676 x 47.5 x 32mm (26 ⁵ / ₈ " x 1 ⁷ / ₈ " x 1 ¹ / ₄ ")
Power cable	UL cable 1.5 meter included, white color
Run/Rest cycle	For every 60 sec running (on), must then rest (off) for 120 sec
Ambient Oper Temp	-10 °C to +60 °C (14 °F to 140 °F)
Listing	UL Listed
Protection class	IP20
Colors	Powder-coated: Grey (RAL 9006), White (RAL 9010), or Black (RAL 9005)
Opening mechanism	Stainless steel chain, chain is centered in case

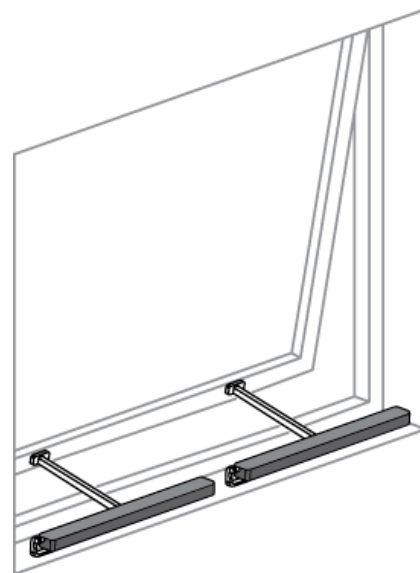

Synchro Quasar is for wide vents providing multiple sash connection points and synchronized operation.

