



SD-6800-T/M-HG-BS


Single Panel Sliding System for Timber & Metal Framed with Soft Closing Sliding System

International Patent Registered



WEIDER Soft Closing and Soft Opening Sliding Door Gear System offers four-wheeled ball bearing hangers which includes a self-closing distance on the closing ends to cover a wide range of residential and commercial applications. HG Series hangers are easy to install and provides measures of optimum visual harmony and extended scope for enhanced aesthetic elegance, and transform doors into contributory design element.

Hanger Design

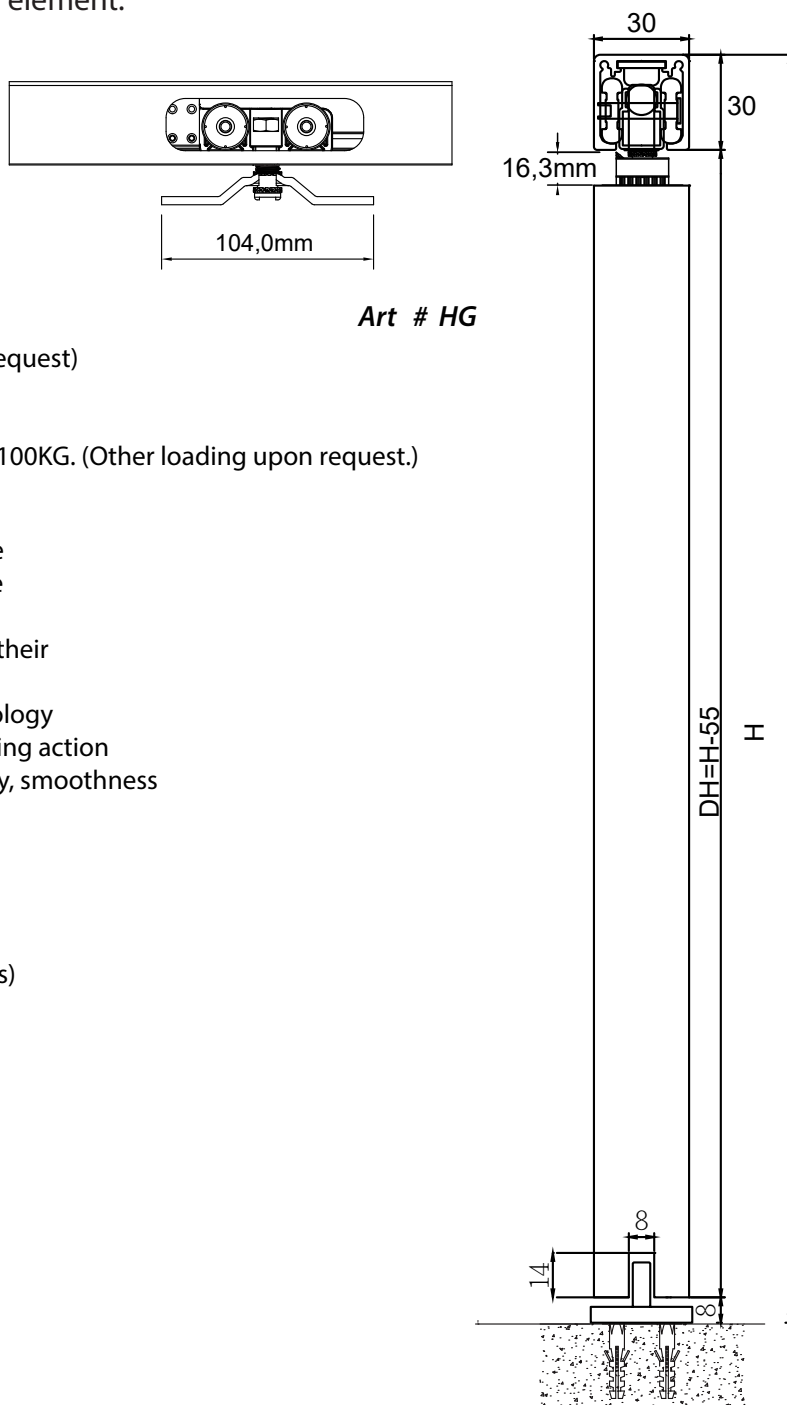

Art # HG

Features and Specifications

- Application: For Timber & Metal Sliding Doors.
- Patented Durable Mechanism
- Minimum Door Width: 800mm (Other dimensions upon request)
- Maximum Door Height: 3000mm
- Total System loading: 120KG
- Soft Dampening actuator loading/ force: 40KG, 60KG, 80KG, 100KG. (Other loading upon request.)
- Standard fittings provided are for ceiling mount.
- Door thickness: 35mm and above
- Zero hacking of floors or zero trip hazard: Does not require bottom rail floor guide all systems are supplied with surface mount floor guide
- User can adjust soft closing and soft opening distance to their preferred design requirements.
- Latching Distance and Finger Trapping Prevention Technology
- One soft closing device will control soft closing and opening action
- Non-maintenance ball bearing wheels to ensure durability, smoothness during operation
- Components used provides good corrosion resistance
- Optional Floor Guide:
 - Ball Bearing Floor guide
 - wall mount ball bearing floating door guide
- Meets requirement of BS EN 1527; Grade 6 (100,000 Cycles)
- Life Cycle Test: 100,000 Cycles (Open/Close)

For more detailed specifications please consult our sales representatives

COLOUR CHART



(NA)

Natural

Anodised

Designed & Manufactured by Weider Metal Australia

GUARANTEE

WEIDER SD-6800 Series are guaranteed for long-term use 100,000 cycles or **1 year** from date of manufacture against any defects in material or workmanship. Defective products will be replaced with a new unit; but no claims for damage incurred or work done thereon will be allowed. This guarantee is void if the product has been subjected to misapplication or abuse.





SL-6800-T/M-HG-BS


Single Panel Sliding System for Timber & Metal Framed

International Patent Registered



WEIDER Sliding Door Gear System offers four-wheeled non maintenance ball bearing hangers with a small track profile to cover a wide range of residential and commercial applications. HG Series hangers are easy to install and provides measures of optimum visual harmony and extended scope for enhanced aesthetic elegance, and transform doors into contributory design element.

Hanger Design

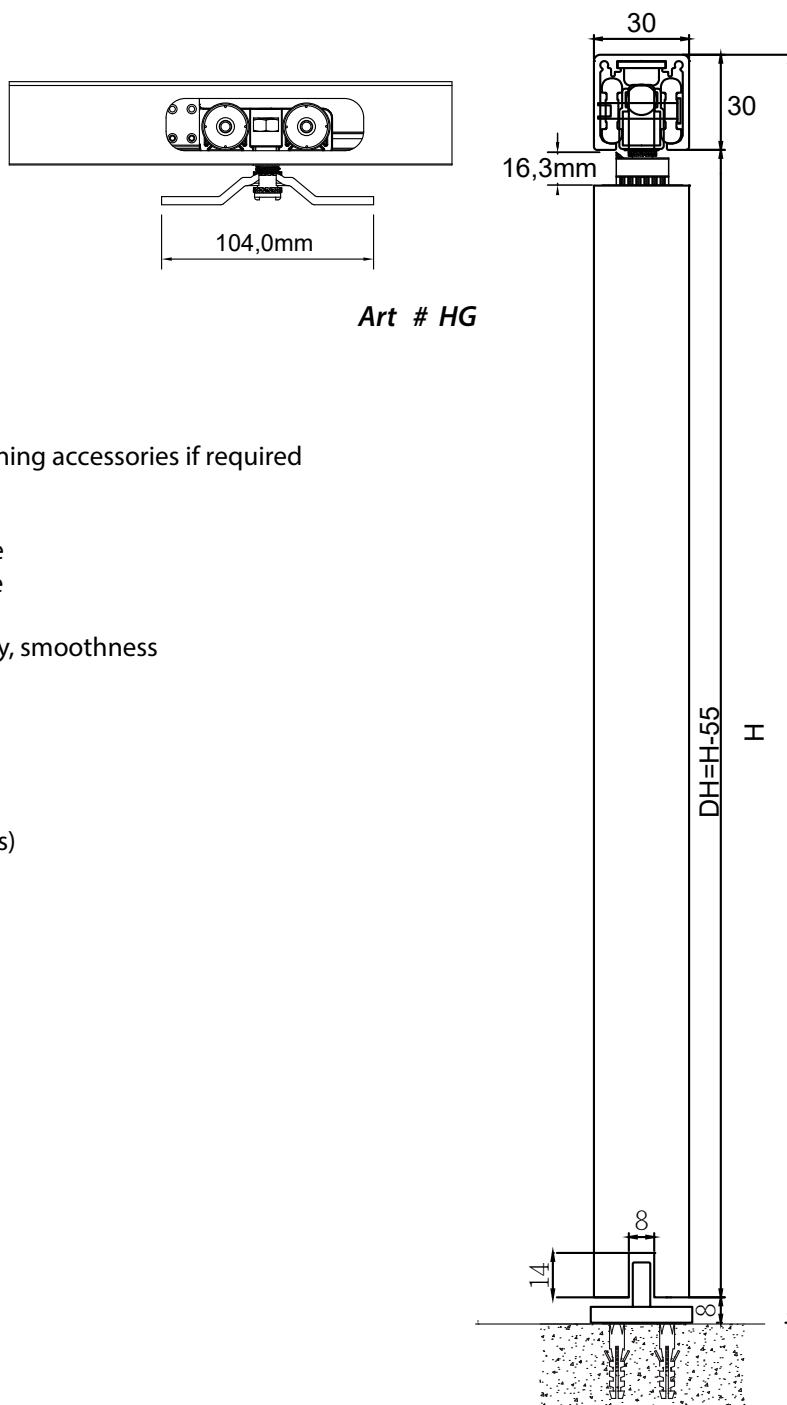

Art # HG

Features and Specifications

- Application: For Timber & Metal Sliding Doors.
- Patented Durable Mechanism
- Minimum Door Width: 550mm
- Maximum Door Height: 3000mm
- Total System loading: 120KG
- Modular system, user can install soft closing and soft opening accessories if required
- Standard fittings provided are for ceiling mount.
- Door thickness: 35mm and above
- Zero hacking of floors or zero trip hazard: Does not require bottom rail floor guide all systems are supplied with surface mount floor guide
- Non-maintenance ball bearing wheels to ensure durability, smoothness during operation
- Components used provides good corrosion resistance
- Optional Floor Guide:
 - Ball Bearing Floor guide
 - wall mount ball bearing floating door guide
- Meets requirement of BS EN 1527; Grade 6 (100,000 Cycles)
- Life Cycle Test: 100,000 Cycles (Open/Close)

For more detailed specifications please consult our sales

representatives

COLOUR CHART



(NA)
Natural
Anodised

Designed & Manufactured by Weider Metal Australia

GUARANTEE

WEIDER SL-6800 Series are guaranteed for long-term use 100,000 cycles or **1 year** from date of manufacture against any defects in material or workmanship. Defective products will be replaced with a new unit; but no claims for damage incurred or work done thereon will be allowed. This guarantee is void if the product has been subjected to misapplication or abuse.

