


Interior Sliding Hardware

For wood top-hung doors

For residential, commercial, institutional & resort applications.


**FUNCTIONAL
FENESTRATION INC.**

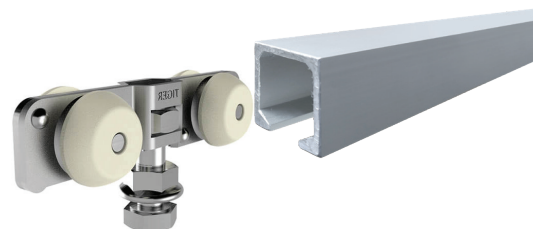


ALU40 & ALU80 aluminum track is Made-in-USA and Class I anodized for 3,000 hour salt-spray corrosion resistance



- Soft close option available for ALU100 series!
- Minimal gap option available for ALU80 and ALU100 Series
- ALU100 Pro for doors up to 220 lbs.



Track is shaped to be self-cleaning and self-plumbing.
Highly durable PETP wheels; Quiet, durable and UV-resistant. No flat spots!

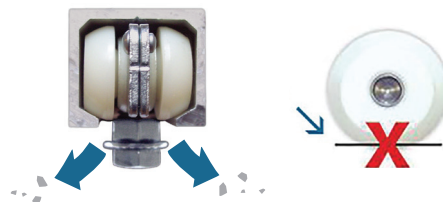

Visit us at www.Fenestration.net for more information

Average Weight Doors up to 90 lbs

ALU40 NEO



Door Weight	1 - 90 lbs
Door Thickness	25mm Min.
Door Width	500mm Min.
Track W x H	26 x 25mm
Track Lengths	6', 8', 12'

Larger Doors up to 176 lbs

ALU80 NEO



Door Weight	121 - 176 lbs
Door Thickness	25mm Min.
Door Width	500mm Min.
Track W x H	31 x 27mm
Track Lengths	6', 8', 12', 20'

NEO ALU80 MX Minimal Gap



Door Weight	121 - 176 lbs
Door Thickness	30mm Min.
Door Width	500mm Min.
Track W x H	31 x 27mm
Track Lengths	6', 8', 12', 20'

Clean, low-profile appearance

Heavy Doors up to 220 lbs

ALU100 Pro



Door Weight	177 - 220 lbs
Door Thickness	25-45mm
Door Width	500-1125mm
Track W x H	35.5 x 39.5mm
Track Lengths	6'6 ³ / ₄ " 8'2 ³ / ₈ " 9'10 ¹ / ₈ "

ALU100 Pro MX Minimal Gap



Door Weight	177 - 220 lbs
Door Thickness	30-45mm
Door Width	500-1125mm
Track W x H	35.5 x 39.5mm
Track Lengths	6'6 ³ / ₄ " 8'2 ³ / ₈ " 9'10 ¹ / ₈ "

Clean, low-profile appearance

See FFI Catalog for full details at www.Fenestration.net



Contact us at:
Phone (800) 677-0228
sales@fenestration.net