



Interior Sliding Hardware

For glass top-hung panels

For residential, institutional, commercial & resort applications.

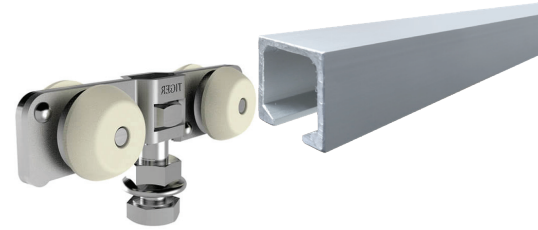

ALU80 NEO Glass

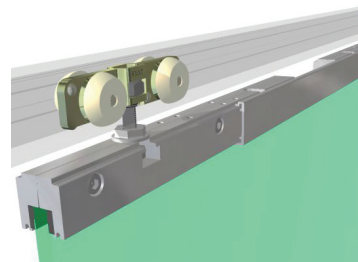

Door Weight	121 - 176 lbs
Glass Thickness	8-10mm
Door Width	500mm Min.
Track W x H	31 x 27mm
Track Lengths	6', 8', 12', 20'

ALU100 Pro Glass




Door Weight	177 - 220 lbs
Glass Thickness	8-10mm
Door Width	500-1125mm
Track W x H	35.5 x 39.5mm
Track Lengths	6'6 ³ / ₄ " 8'2 ³ / ₈ " 9'10 ¹ / ₈ "



ALU80 aluminum track is Made-in-USA and Class I anodized for 3,000 hour salt-spray corrosion resistance



- Soft close option available for ALU100 series!
- Minimal gap option available for ALU80 and ALU100 Series
- ALU100 Pro for doors up to 220 lbs.



Track is shaped to be self-cleaning and self-plumbing. Highly durable PETP wheels; Quiet, durable and UV-resistant. No flat spots!



See FFI Catalog for full details at www.Fenestration.net



Contact us at:
Phone (800) 677-0228
sales@fenestration.net